



Welcome to the World of Fasteners from...

DinStock™



EN14399-3 PRE-LOAD FASTENERS HR & HV


High Strength Friction Grip 8.8 & 10.9

Standard production from M12 to M36 in diameter and up to 300mm in length, however, larger sizes can be manufactured to order. Available in Plain, Electro-Zinc and Galvanized finishes from stock. Certification and testing available on all bolt configurations.



EN14399-6 THROUGH HARDENED WASHERS


Offered in Plain, Electro-Zinc and Galvanized finishes, M12 to M48 diameters. For use with HR and HV HSFG bolting.

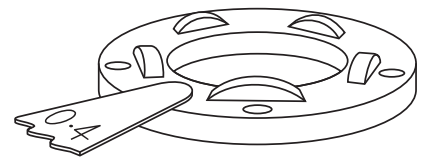

EN14399-9 DTI WASHERS 8.8 & 10.9

Direct Tension Indicating washers provide a simple and foolproof way to ensure the correct tension has been applied. A quick and easy way of inspection that reduces time and labour costs by means of a simple visual check.


EEC manufactured and fully certified DTI washers are offered in Plain and Mechanically Galvanized finishes. We also stock a large range of Din.6917 and Din.6918 hardened tapers.

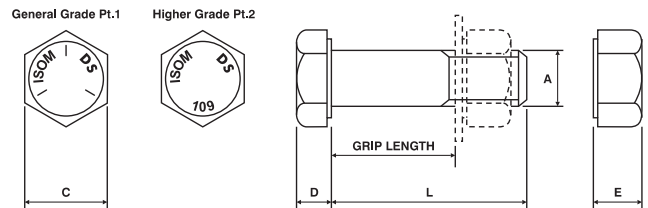

NON PRE-LOAD FASTENERS SB 8.8, 10.9 & 12.9

Din.931 / 933 / 960 / 961

Standard Non-Preferred and Special hexagon bolting from M6 to M100 diameters. We stock a large range of bolting both in finished sizes and blank forgings up to 1,500mm long enabling quick modification to meet any requirement quickly.

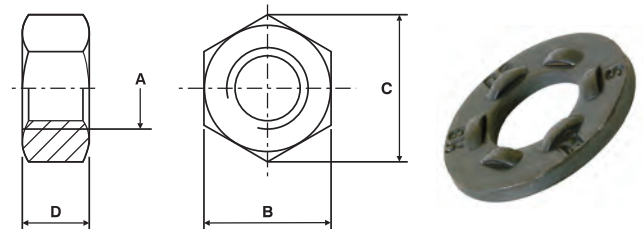

DinStock™

C1 Hortonwood 10, Telford, Shropshire TF1 7ES, UK

t +44 (0)1952 676700

f +44 (0)1952 676800

e sales@dinstock.com

www.dinstock.com



We offer full mechanical and chemical certification, complete with full load test certificates using our TesT rotation loading equipment that meet the new CE test requirements.



Certificate No. LRQ 4006330

Full in-house testing on all bolting, nuts and washers to meet with all EU/CE requirements for pre-load and non pre-load bolt assemblies. Certified to ISO.9001:2008 with Lloyds Registrar and CE Approval to EN14399 (preload fasteners).